

● Buffers



Features

Circular and rectangular types are easily fitted. Reduction of transmitted shock loads enables equipment to be designed more economically.

The rising stiffness properties enable vehicle suspension characteristics to be optimised.

ANB - R is made in oil and chemical resistant Nitrile Rubber.


Metalastik[®] type Buffers

Buffers are designed to protect structures and equipment from impact forces. They are usually fitted as non-metallic stops or incorporated in vehicle suspension systems to provide progressive stiffening under increasing load.


Typical applications:

- Dump trucks
- Off-road vehicles
- Cranes
- Handling equipment
- Vehicle suspensions


Conical

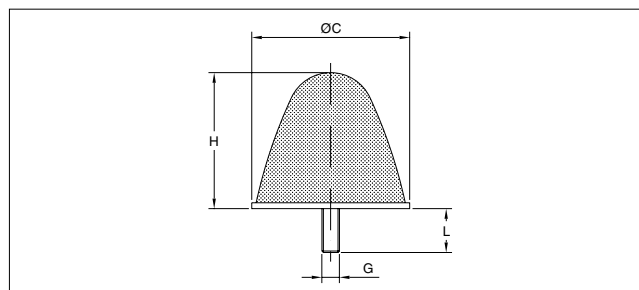

Rectangular

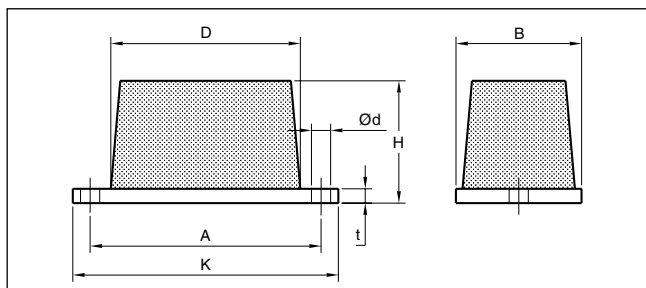

Cylindrical

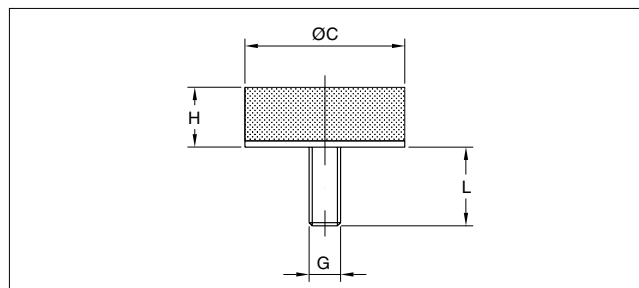


Type	Part no.	Dimensions in mm				Weight (kg)
		C	H	G	L	
Cylindrical buffers	15-1363-60	10-00341-01	21	19	M6	0.02
	15-3464-60	10-00342-01	32	21	M8	0.05
	15-3459-60	10-00337-01	51	19	M10	0.1
Conical buffers	15-3462-60	10-00340-01	28.5	37	M6	0.03
	15-3458-60	20-00686-01	32	28.5	M8	0.04
	15-3461-60	10-00339-01	38	38	M8	0.06
	15-3435-60	10-00334-01	48	51	M10	0.12
	15-3460-60	10-00338-01	70	46	M12	0.27
	15-3445-60	0-00336-01	108	95	M12	0.79
	15-3443-60	10-00335-01	108	121	M12	0.99



Type	Part no.	Dimensions in mm							Weight (kg)	
		K	A	B	H	D	d	t		
Rectangular buffers	15-0437-60	10-00322-01	121	105	48	56	86	8.6	6.3	0.48
	15-0238-60	10-00315-01	121	105	57	56	86	8.6	6.3	0.55
	15-0260-60	10-00317-01	156	127	64	37	89	13.5	6.3	0.57
ANB R-50*	20-00417-01		84	68.5	32	22	51	6.7	3	0.06

* Manufactured in 70° IRH Nitrile Rubber

Cylindrical

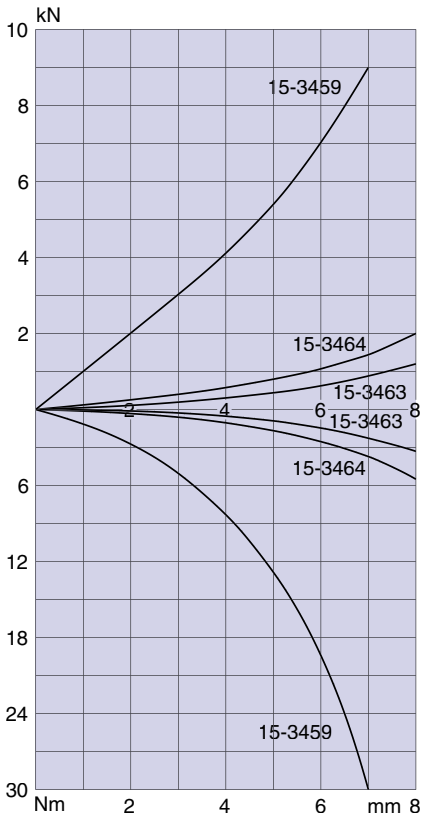

Rectangular

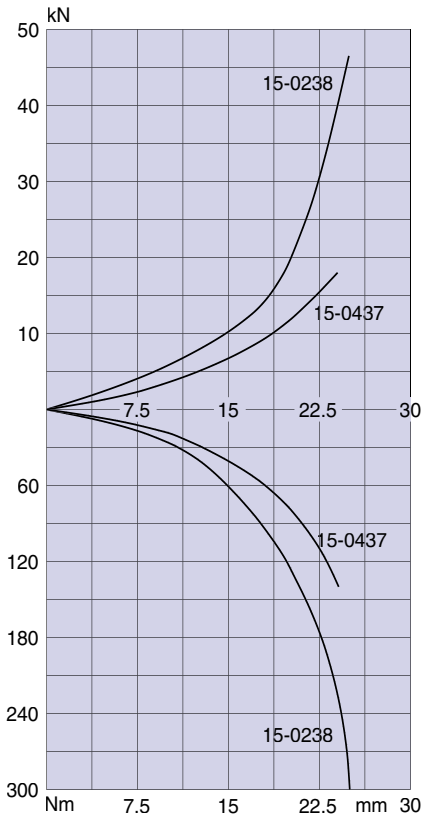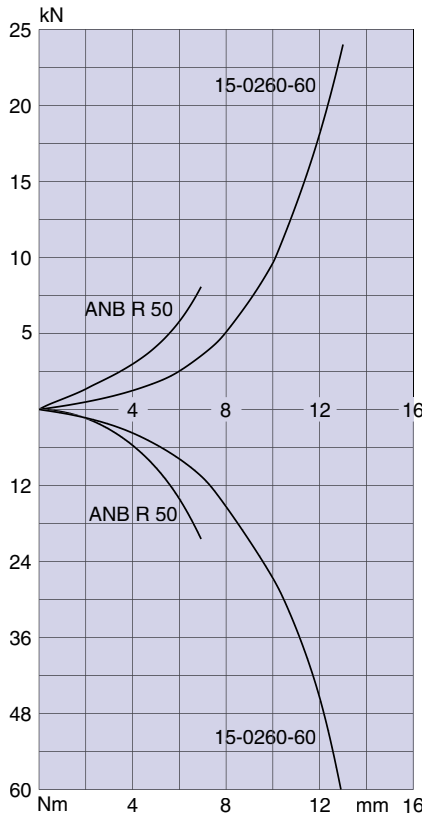

Conical

