


AKUSTIK PIPE

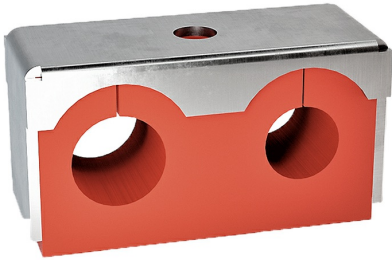

AMC-MECANOCAUCHO® Akustik Pipe consist in a double-hole Sylomer part enclosed in a steel housing.

The assembly of this mounting is very simple due to the easily removable Sylomer part and its single fastening hole. The uncovered distance by the housing determines the preload of the Akustik Pipe, allowing the bolt to be tightened until the housing is firmly in contact with the base.

AMC-MECANOCAUCHO® Akustik Pipes are specially suitable for applications where rigid or flexible pipes must be isolated, both for static and dynamic applications.

CARACTERÍSTICAS TÉCNICAS

Advantages


- Compact design
- Fail-safe feature
- Multidirectional mount
- Excellent noise isolation
- Corrosion resistant
- Maintenance-free
- No aging

APLICACIONES

- Construction machinery
- Mining equipment
- Buses
- HVAC equipment
- Hydraulic equipment




PLANOS

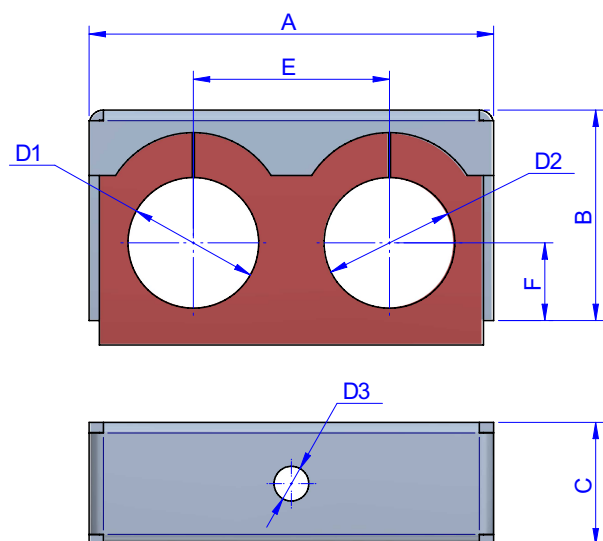

DIMENSIONES

Tipo	K (N/mm)	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	D1	Diam. Ext. tubo D1	D2	Diam. Ext. tubo D2	D3	Código
Type A	84	70	34,5	29	36	14,5	15	5/8"	18	3/4"	8,5	23872
	100	70	34,5	29	36	14,5	18	3/4"	18	3/4"	8,5	23873
	76	82	42	29	43	16	21,2	7/8"	24,3	1"	8,5	23874
	302	70	34,5	29	36	13	22	7/8"	22	7/8"	8,5	23871
	53	99	51,5	30	48	21	28	1-1/8"	28	1-1/8"	8,5	23876
	106	99	51,5	30	48	21	32	1-3/8"	32	1-3/8"	8,5	23875

PLANOS

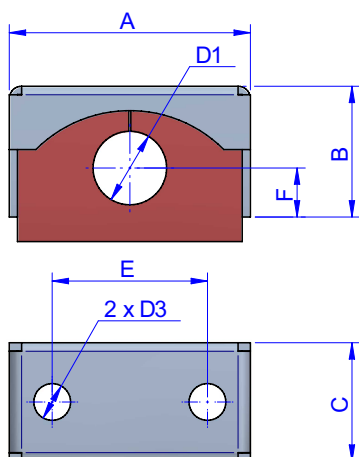

DIMENSIONES

Tipo	K (N/mm)	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	D1	Diam. Ext. tubo D1	D2	D3	Código
Type B	96	59	32	29	38	12	18	3/4"	-	9	23877



AMC MECANOCAUCHO
 Industrialdea Zona A - Pab. 35.
 Asteasu E-20159, Gipuzkoa
 Spain



Tel.: +34 943 69 61 02
 Fax: +34 943 69 62 19




sales@amcsa.es



www.mecanocaucho.com
 www.akustik.com

PLANOS

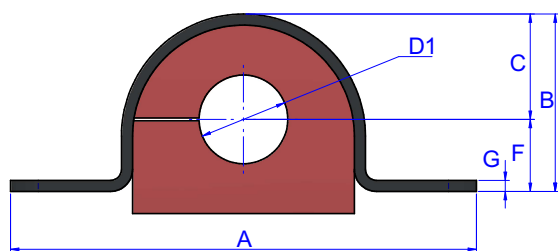


DIMENSIONES

Tipo	K (N/mm)	A (mm)	B (mm)	C (mm)	E (mm)	F (mm)	G (mm)	H (mm)	I (mm)	D1	Diam. Ext. tubo D1	D2	Código
Type Omega	28	84	32	19	66	13	2	20	25	10	1/2"	6,5	23892
	54	84	32	19	66	13	2	20	25	14	5/8"	6,5	23893
	43	94	42	24	76	18	2	20	25	20	7/8"	6,5	23894
	61	94	42	24	76	18	2	20	25	26	1-1/8"	6,5	23895
	28	69	24	13	51	11	2	20	25	5,5	1/4"	6,5	23896
	55	84	32	19	66	13	2	20	25	16	3/4"	6,5	23897
	110	104	50	28	86	22	2	20	25	33	1-3/8"	6,5	23898



Propiedades elásticas

LOAD-DEFLECTION

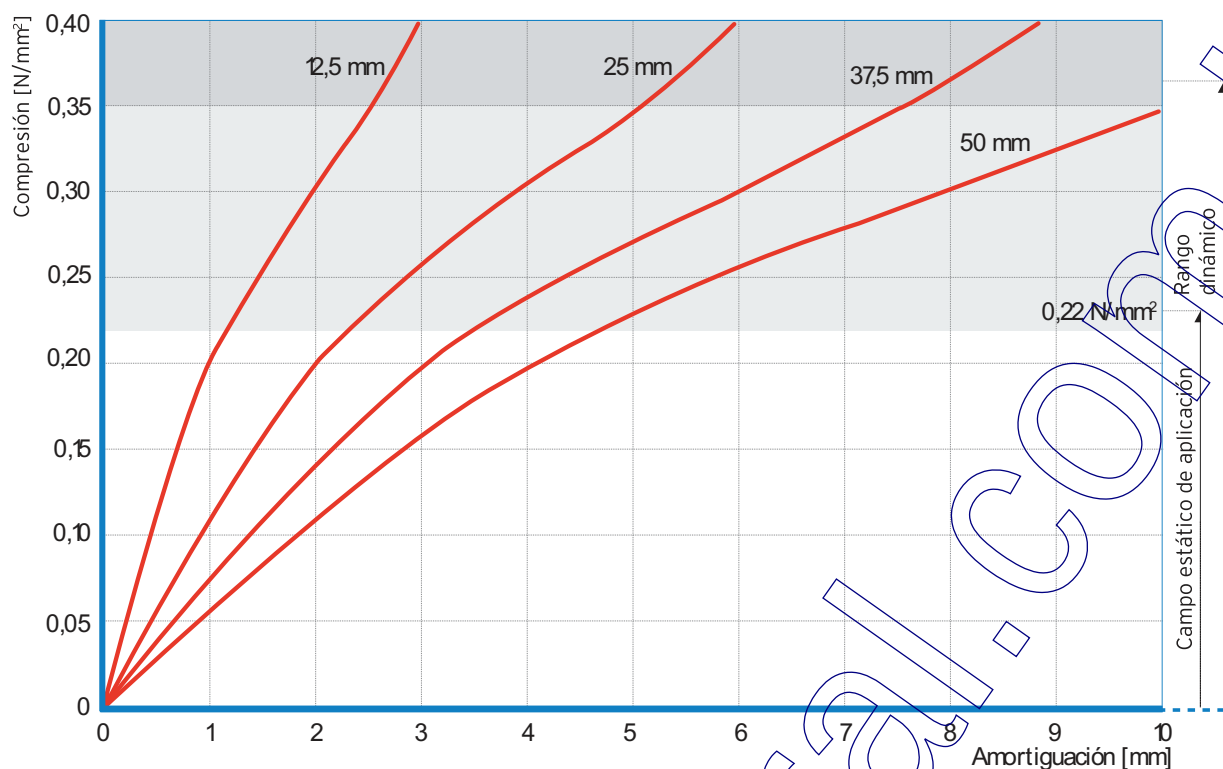

NATURAL FREQUENCY

